




TC1 – the mobile measuring unit

Torque Control monitors the torque and thus the on-site bolting process. The system works without cables and is compatible with Plarad's current nutrunner program.



Pressure regulation unit

The desired torque can be set at the pressure regulation unit in accordance with the value listed in the included torque table.

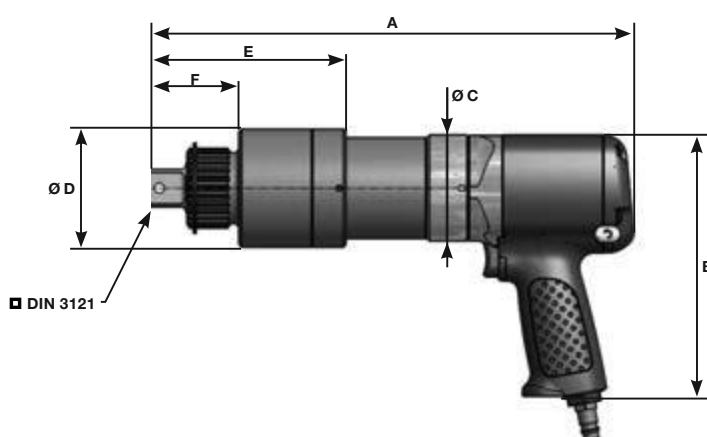

Typ	Pressure p (bar)	Torque range (Nm)	Speed n (rpm)*	A (mm)	B (mm)	C (mm)	Ø D (mm)	E (mm)	F (mm)	■ = Output drive	Weight (kg)
DP1-05	6	125 - 500	55	21	1	2	65	15	605		
DP1-10	6	250 - 1.000	25	2	1	2	65	15	605		
DP1-20	6	30 - 2.000	2	321	1	2	0	132	615	1	60
DP1-30	6	50 - 3.000	2	33	1	2	0	132	615	1	66
DP1-36	6	60 - 3.600	36	33	1	2	0	132	615	1	66